



4700 Broadmoor SE, Suite 200
Kentwood, MI 49512

Telephone: 616-656-7401
Facsimile: 616-656-2022
www.intertek-etlsemko.com

Danko Design Initiative
Date: October 8, 2013

Report No.:101353467GRR-001
Page 1 of 17

Test Report For:
Danko Design Initiative
ANSI/BIFMA X5.1-2011
CHAIR TEST STANDARD
Danko Chair

Lynwood Pearson
Project Manager

Anthony Serge
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Attention: Peter Danko
Danko Design Initiative
839 McKenzie Street
York, PA 17403
Phone: (717) 309-3731
Email: peterdanko@peterdanko.com

DATE RECEIVED: 9/18/2013
DATES TESTED: 9/18/2013 – 10/4/2013

DESCRIPTION OF SAMPLES:

Part Description: Danko Chair
Condition of Test Sample: New

WORK REQUESTED/APPLICABLE DOCUMENTS:

To test the submitted sample per ANSI/BIFMA X5.1-2011 Chair Test Standard for the following test program:

<u>Test No.</u>	<u>Test Description</u>
6	Back Rest Strength-Non-Tilt
8	Drop-Dynamic
11	Seating Durability
12	Stability
16	Backrest Durability-Non-Tilt
18	Leg Strength

CONCLUSION:

The submitted sample meets the acceptance criteria of the tests listed above.

TEST EQUIPMENT:

Asset	Description	Cal Date	Cal Due
138012	SCALE / 0-1,000 #	2/22/2013	2/22/2014
138272	LOAD CELL 0-1,000 #	2/22/2013	2/22/2014
138039.1	BAG WEIGHT- (300 lbs)	12/07/2007	VBU
138039.2	BAG WEIGH- (225 lbs)	12/07/2007	VBU
138042	SEATING IMPACT / 2 STATION	VBU	VBU
138043	BACK DURABILITY 0-300lbs	VBU	VBU
138302	STOPWATCH	07/10/2012	07/10/2014
138170	FRONT STABILITY WEIGHT	04/14/2008	VBU
138279	FORCE GAGE; DIGITAL 100LB	04/02/2013	04/02/2014
138282	STEEL RULE 0-60" x 1/64	06/05/2013	06/05/2014
138148	DIGITAL PROTRACTOR	09/16/2013	09/16/2014

6. BACK STRENGTH PROCEDURE - STATIC (Type II-III – Non-Tilt Seat):

Date Tested: 10/3/2013
Condition of Test Sample: New

Test Procedure:

Test Method: ANSI/BIFMA X5.1 2011; Test No. 6
Functional Load: 150 lbf.
Proof Load: 250 lbf.

Number of Samples Tested: One (1)

Acceptance Criteria:

Functional Load: There shall be no loss of serviceability to the chair.

Proof Load: There shall be no sudden and major change in the structural integrity of the product. Loss of serviceability is acceptable.

Results:

Sample No.	Static Load	Description of Results
1	150	Pass
	250	Pass

The sample meets the acceptance criteria of the test described above. Refer to the following page for photograph.



BACK STRENGTH PROCEDURE - STATIC

8. DROP TEST – DYNAMIC:

Date Tested: 10/4/2013
Condition of Test Sample: Production

Test Procedure:

Test Method: ANSI/BIFMA X5.1-2011; Test No. 8
Functional Load: 225 lbs.
Proof Load: 300 lbs.
Drop Height: 6"
Number of Samples Tested: One (1)

Acceptance Criteria:

Functional Load: No structural breakage or loss of serviceability, including stacking ability if applicable.

Proof Load: No sudden and major change in the structural integrity of the product. Loss of serviceability is acceptable.

Results:

Sample Number	Drop Weight	Results
1	Functional Load - 225 lbs	Pass
	Proof Load - 300 lbs	Pass

The submitted sample meets the acceptance criteria of the test described above. Refer to the following page for photograph.



DROP TEST – DYNAMIC

11. SEATING IMPACT TEST

Dates Tested: 9/23/2013 – 10/1/2013
Condition of Test Sample: New

Test Procedure:

Test Method: ANSI/BIFMA X5.1-2011; Test No. 11

Section 11.3

Seat Center Impact Test

Bag Diameter: 16"
Bag Weight: 125 lbs.
Number Cycles: 100,000
Height of Drop: 1.2"
Cycles per Minute: 10 to 30

Section 11.4

Load Ease Test

Bag Diameter: 8"
Bag Weight: 165 lbs.
Number of Cycles Required: 20,000 to each Front Corner
Cycles per Minute: 10 to 30
Number of Samples Tested: One (1)

Acceptance Criteria:

There shall be no loss of serviceability to the chair after completion of both the Impact and Load Ease Tests.

Results:

Section 11.3

Sample No.	Number of Cycles	Description of Results
1	100,000	Pass

Section 11.4

Location of Force	Number of Cycles	Description of Results
Left Front Corner	20,000	Pass
Right Front Corner	20,000	Pass

The submitted sample meets the acceptance criteria of the test described above. Refer to the following pages for photographs.



Seating Impact Test



Load Ease Test

12. STABILITY TEST -DYNAMIC (Front and Rear):

Date Tested: 9/18/2013
Condition of Test Sample: New

Test Procedure:

Test Method: ANSI/BIFMA X5.1-2011; Test No. 12
All of the chair's adjustable features shall be set for the most unstable conditions.

Chair Type: III

Weight in Seat

(Rear Stability Only):
Type I: 286 lbs. (13 disks)
Type II: 286 lbs (13 disks)
Type III: 132 lbs (6 disks)

Front Stability:

Alternative: N/A
Vertical Load: 135 Lbs
Horizontal Force: 4.5 Lbs
Number of Samples Tested: One (1)

Acceptance Criteria:

Front Stability: The chair shall not tip over as the result of the force application of 4.5 lbf..

Rear Stability:

The force to tip shall not be less than:
Type I: Chair must not tip over
Type II: Chair must not tip over
Type III: [F = 1.1 (47 – H) pounds force.]. H is the seat height in inches. For chairs with seat height equal to or greater than 710 mm (28.0 in.), a fixed force of 93 N (20.9 lbf.) shall be applied.


Results:

Sample ID	Seat Height	Front Stability	Rear Stability	Results
1	18"	24.7 lbf. to tip	52 lbf. to tip	Pass

The submitted sample meets the acceptance criteria of the test described above. Refer to the following pages for photographs.



Stability Test - Rear

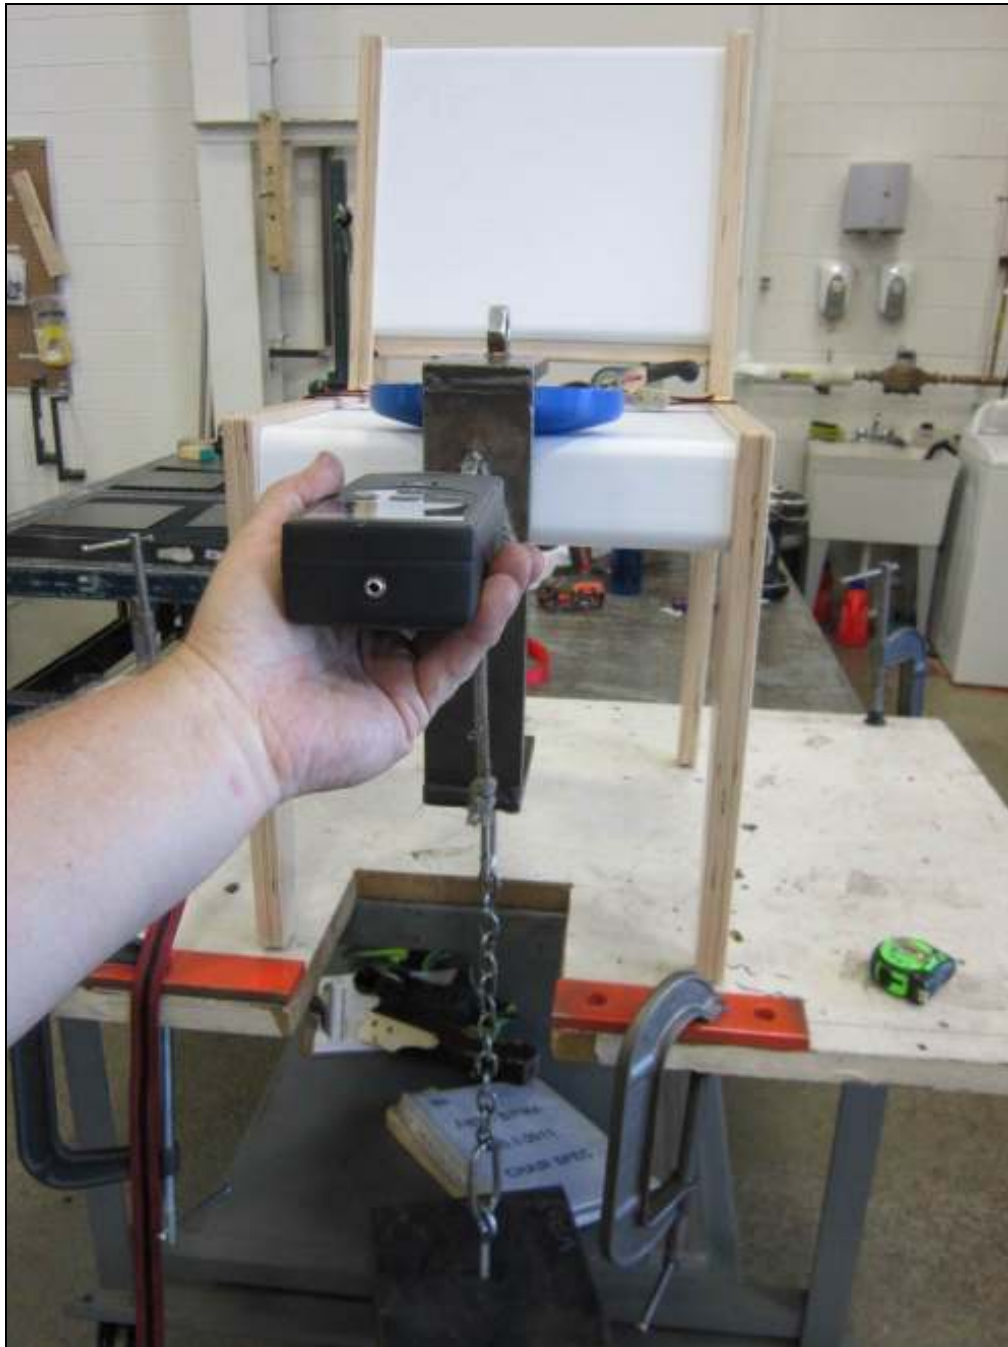

Stability Test - Front

16. BACK DURABILITY TEST-CYCLIC (Type III):

Dates Tested: 9/19/2013 – 9/23/2013
Condition of Test Sample: New

Test Procedure:

Test Method: ANSI/BIFMA X5.1-2011; Test No. 16
Backrest Width: 16”
Number of Cycles Required: 120,000
Center Pull Location: 120,000
Force Applied to Chair Back: 75 lbf.
Load in Seat: 225 lbs.
Cycles per Minute: 10 to 30

Number of Samples Tested: One (1)

Acceptance Criteria:

No structural breakage or loss of serviceability.

Results:

Sample No.	Pull Location	Number of Cycles	Description of Results
1	Center Pull	120,000	Pass

The sample meets the acceptance criteria of the test described above. Refer to the following page for photograph.



BACK DURABILITY TEST-CYCLIC

18. LEG STRENGTH TEST - FRONT & SIDE APPLICATION:

Date Tested: 10/3/2013
Condition of Test Sample: New

Test Procedure:

Test Method: ANSI/BIFMA X5.1-2011; Test No. 18

Front to Rear Leg Application:

Functional Load: 75 lbf. (Load Each Leg)
Proof Load: 113 lbf. (Load Each Leg)

Side Load Application:

Functional Load: 75 lbs. (Load Each Leg)
Proof Load: 113 lbs. (Load Each Leg)

Number of Samples Tested: One (1)

Acceptance Criteria:

Functional Load: No structural breakage or loss of serviceability, including stacking if applicable.

Proof Load: No sudden and major change in the structural integrity of the product. Loss of serviceability is acceptable.

Results:

Sample No.	Load Application	Functional	Proof	Description of Results
1	Side to Side (Rear Side)	75 lbf.	113 lbf	Pass
	Side to Side (Front Side)	75 lbf.	113 lbf	Pass
	Front to Rear (Left Side)	75 lbf.	113 lbf.	Pass
	Front to Rear (Right Side)	75 lbf.	113 lbf.	Pass

The sample meets the acceptance criteria of the test described above. Refer to the following pages for photographs.



LEG STRENGTH TEST

